


Water Well Drill Pipes


Brunnenbohrgestänge

Flush OD

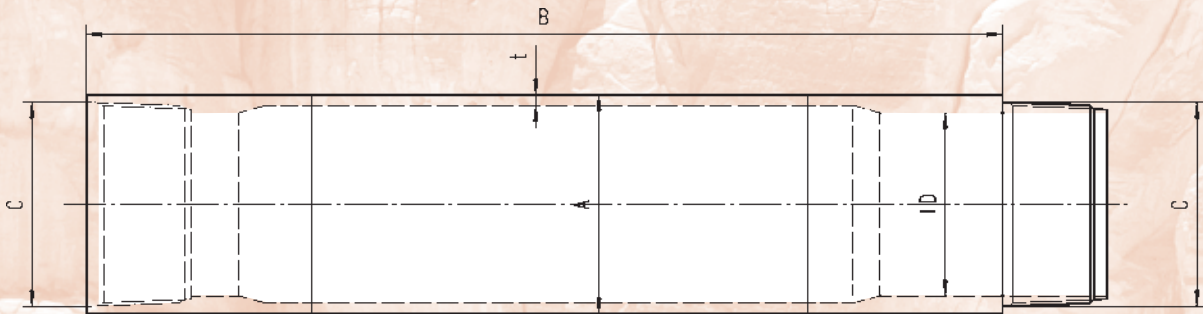

A OD mm	t wall inches	C tool joints connection	ID mm	max. machine torque kNm	approx. weight for 3m length kg	drawing no
82,5	7,1	"Tr 71,5 x 1/4"	51	7,7	29	VB 1119.00.00
95	7,1	"Tr 80,6 x 1/4"	60	10,1	50	VB 976.00.00
146	7,1	"Tr 136 x 1/4"	122	27,3	76	VB 1103.00.00
152,4	8	"Tr 143 x 1/4"	125	33,1	91	VB 240.00.00

Upset OD

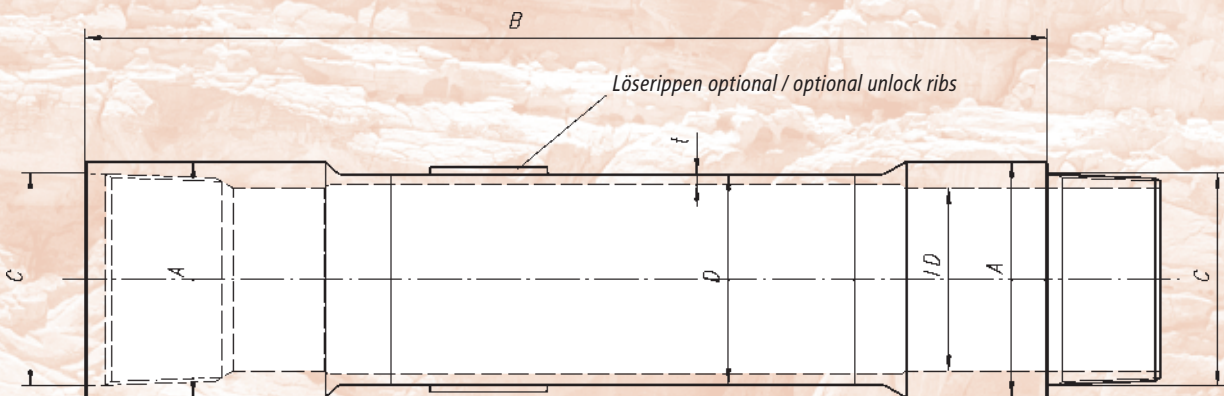

D mm	t wall mm	C tool joints connection	A OD mm	ID mm	max. machine torque kNm	approx. weight for 3m length kg	drawing no
76,1	6,3	"Tr 71,6 x 1/4"	82,5	57,5	6,0	34	SK 10.00.00
76,1	7,1	"Tr 71,5 x 1/4"	83	51	6,4	36	VB 184.00.00
82,5	6,3	"Tr 84 x 1/4"	95	66	7,0	40	SK 11.00.00
101,6	4,5	"Tr 94 x 1/5"	106	72	8,3	38	VB 1131.00.00
114,3	5,6	"Tr 114 x 1/4"	128	81,5	13,1	54	VB 1141.00.00
114,3	4,5	"Rd 138,2 x 1/4"	150	103,2	10,8	46	VB 1140.00.00
114,3	6,3	"Tr 117 x 1/4"	125	98,3	14,5	55	SK 14.00.00
146	6,3	"Tr 146 x 1/4"	159	127	24,6	73	SK 12.00.00
146	7,1	"Tr 146 x 1/4"	164	127	27,3	85	VB 41.00.00

- auf Kundenwunsch mit angeschweißten Löserippen / on request with unlock ribs welded on
- auf Kundenwunsch mit Schlüsselflächen / on request with spanner flats